



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S R4W

SEC 26 | SEC 25
SEC 35 | SEC 36

U.S.B.&M.


E-21



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 12°43'45" W	35.54'
L2	S 62°19'46" W	30.6'
L3	S 17°02'49" E	33.83'
L4	N 43°20'28" E	32.44'

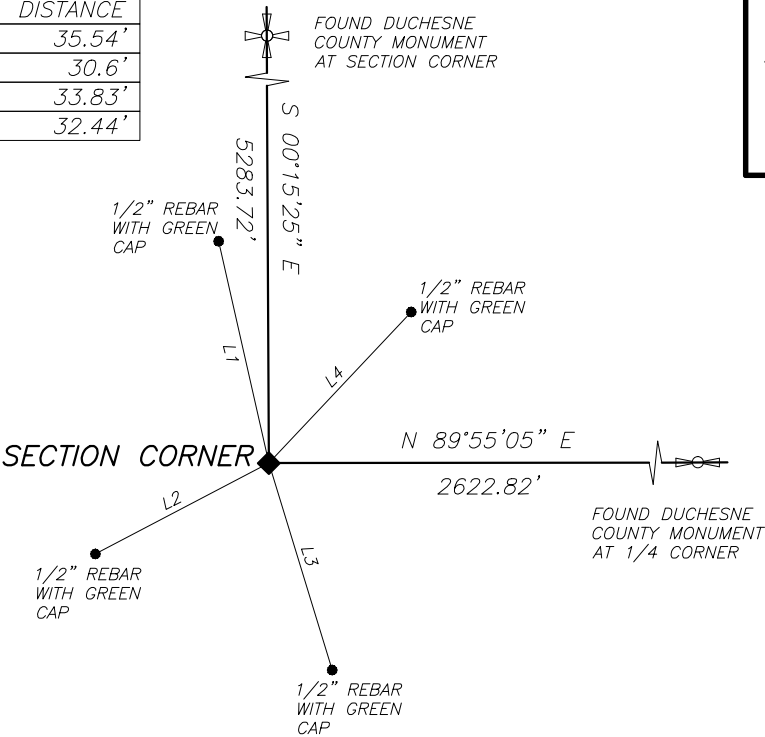

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT. 40°17'10.77708"N AND LONG. 110°16'30.42365"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 5/8" REBAR WITH STONE ALONG SIDE AT POSITION OF SECTION CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

REPLACED FOUND SHORT REBAR WITH A 5/8"x24" REBAR WITH A DUCHESNE COUNTY 2 1/2" DIA. ALUMINUM CAP AND 1/2" REBAR GREEN CAP REFERENCE MONUMENTS AS SHOWN



PHOTO OF MARKINGS ON MONUMENT

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7269831.614
E: 1976933.902
NAVD88 EL: 6343.11'

LATITUDE: 40°16'16.82353" N
LONGITUDE: 110°17'38.18957" W
ELLIPSOID HEIGHT: 6287.48'
(GEOID 12B CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300020S0040W0_600200



PHOTO OF CORNER FACING NORTH

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 20 MAY '19

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

